

SCREW REFRIGERATION COMPRESSOR UNIT

Single-Stage Screw Refrigeration Compressor Unit


Compound Two-Stage Screw Refrigeration Compressor Unit

Skid-Mounted Separate Two-Stage Screw Compressor Unit



冰轮环境技术股份有限公司 MOON ENVIRONMENT TECHNOLOGY CO.,LTD.

With continuous technological and manage has

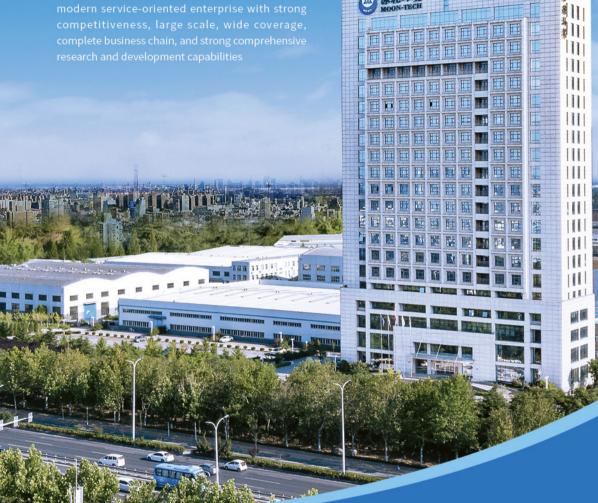





Industrial Park in the US



Malaysian Industrial Park



Industrial Park in the UK



Vietnam Industrial Park



Baoding Industrial Park



Guxian Industrial Park



Laishan Industrial Park



Jinan Center



Low-temperature refrigeration



Central airconditioning



Environmentally friendly heating



Energy and chemical equipment



Precision Casting



Hydrogen Energy Development



Smart Services



Intelligent Packing Machinery and Warehouse Storage System

With devoting to improving the quality of human life as the enterprise mission, MOON-TECH continuously build and enhance competitive advantages in the field of comprehensive energy utilization and accelerate the process of globalization, taking the revitalization of national industry and achievement of customer value as its responsibility, continuously creates and improves its competitive advantage, striving to become an evergreen enterprise with core competitiveness, loved by employees and respected by industrial partners.




















Following the requirements of the environmental policy of harmonious coexistence between human and nature, MOON-TECH is committed to the innovation of artificial environment control technology and comprehensive energy utilization technology to promote a simple, moderate, green and lowcarbon mode of social production and operating system, actively building an interconnected and complementary system, including refrigeration, heating, water, gas, electricity, sewage, waste within the -271 °C -200 °C temperature and 0-90Mpa pressure range, aiming to achieve an energy ecological link between industrial parks and living spaces, and become an intelligent green energy system solution service provider. MOON-TECH also dedicates to develop the utilizations of NH3、CO2、HC、He、H2O and other environmentally friendly substances application technologies, striving to provide professional, high valueadded intelligent energy comprehensive utilization solutions.

In recent years, MOON-TECH actively actualized the green and low-carbon developing concept, accelerating the transformation of traditional industries around the dual-carbon goal and energy revolution, promoting the upgrading of the industrial structure to a low-carbon and high-quality level, and set six goals of "low-carbon industry, low-carbon technology, low-carbon manufacturing, low-carbon chain, low-carbon services, low-carbon culture", so as to ultimately realize the industrial structure of high-end, low-carbon consumption of energy, utilization of resources recycling, cleanliness of the production process, and to contribute to the realization of dual-carbon target.

MOON-TECH

(Stock Code of 000811)

Founded in 1956, Moon Environment Technology Co., Ltd (Stock Code: 000811). is a diversified and international comprehensive equipment industrial enterprise. The main business covers low-temperature refrigeration, central air conditioning, environmental protection heating, energy and chemical equipment, precision castings, smart services, hydrogen energy development, etc. In recent years, MOON-TECH has successively won the titles of Top 30 Enterprises with Core Competitiveness in China's Machinery Industry, Top 100 Enterprises of National Machinery Industry, Meritorious Enterprise of Equipment in China, and Demonstration Enterprise for Ozone Layer Protection.

For a longtime, with continuous technological and manage has promoted the continuous optimization of resource allocation and reconstruction of core competencies, accelerated international expansion transformation. We have transformed from a traditional manufacturing enterprise to a modern serviceoriented enterprise with strong competitiveness, large scale, wide coverage, complete business chain, and strong comprehensive research and development capabilities

With the synchronous development of refrigeration and heat treatment, and actively expanding energy-saving and environmental protection industry as developing strategy, MOON-TECH is engaged in the technical research and development of low-temperature environment, waste heat recovery, gas compression, industrial heat exchange, urban clean emission and other fields, as well as the production and sales of related complete sets of equipment, and specializes in food refrigeration, chemical process cooling, comfortable environment air conditioning, research temperature control, process gas compression, building aggregated cooling, comprehensive application of heat energy, permafrost drilling, waste treatment, tec. MOON-TECH has production bases, scientific research centers and marketing& service organizations in more than 40 countries around the world. With safe, environmentally friendly, energysaving, intelligent and Butler-style system integration capabilities, MOON-TECH is providing products with entire product life cycle to users in more than 120 countries and regions around the world.

MOON-TECH has 6 national scientific and technological innovation platforms

including the National-Recognized Enterprise Technology Center and 16

provincial scientific and technological innovation platforms including the

Shandong Provincial Key Laboratory of Energy Saving and Environmental



Product Description

With more than 60 years of manufacturing experience in refrigeration and air-conditioning equipment and continuous technical research and development capabilities, MOON Environment Technology Co., Ltd., after years of joint research on production, teaching and research, has carried out innovative experimental studies on the theoretical research of thermal and dynamic performance of compressors and the visualization of practical work process, pressure pulsation, rotor force and oil distribution, which accurately revealed the internal laws between the design parameters such as rotor profile and orifice position and the thermal and dynamic performance of the screw compressor, forming a complete screw compressor design theory. On this basis, MOON-TECH developed a series of new efficient screw compressor units with more than 10 independent intellectual property rights and core technology.

MOON-TECH screw refrigeration compressor series products are widely used in the fields requiring artificial low temperature environments such as food freezing and refrigeration, chemical process cooling, gas pressurization and liquefaction, building aggregate cooling, temperature control of scientific research, exploration of frozen soil, sports venues, mine heat treatment, etc.



















Since the advent of the LG series of high-efficiency screw compressors, they have been well-received by users at home and abroad for their great performance and reliability. The series products have won the First Prize for Scientific and Technological Progress of Shandong Province, First Prize for Scientific and Technological Progress of Ministry of Education, Special Award of Scientific and Technological Progress of Chinese Association of Refrigeration and Second Prize for National Scientific and Technological in 2006. MOON-TECH continues to carry out scientific research, and has made key breakthroughs in working media, operating conditions, energy efficiency indicators, etc., and successfully achieved the transformation and upgrading of screw compressor manufacturing and application. The project of "Key Technologies R&D and Application of Screw Compressor with Special Medium under Extreme Working Conditions" won the First Prize for Scientific and Technological Progress of Year 2019 China Machinery Industry.












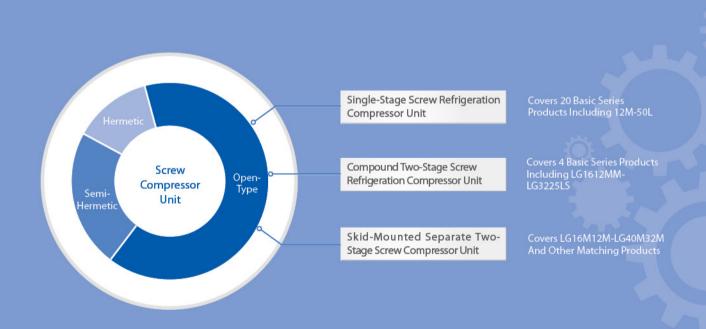



High-Grade, Precision and Advanced Machining and Testing Equipment



Flexible Machining Center



Flexible Machining Center



Rotor Machining and Production Line



Rotor Finishing Center



Comprehensive Performance Test Center



Trilinear Coordinates Measuring Instrument

New Design





Variable Frequency and Variable Capacitance

During part load operation, it is controlled by frequency conversion, which can realize stepless automatic adjustment of the internal volume ratio according to the operating conditions, so that the compressor operates efficiently.

Lubrication System

The oil circulation system combining forced oil supply and differential pressure oil supply has excellent lubrication, sealing, cooling and noise reduction performance.

Material

Select the best materials for the housing and rotor based on the use conditions and design standards.

Rotor

- •The mature and stable profile design with independent intellectual property rights (bilateral asymmetric full arc envelope profile) is more suitable for grinding processing, and the line seal is changed to a belt seal to effectively control the meshing gap;
- •Optimize the number of teeth combination according to the rotor diameter, the tooth height coefficient, peak height coefficient, diameter and draw ratio, lead and torsion angle form a reasonable tooth matching;
- •It is machined by high-precision British and German CNC grinding machines.

Suction and Exhaust

The suction and exhaust ports are processed by national patented irregular corrugated mechanical noise reduction technology, which has lower resistance, less pressure loss and significantly reduces noise.

Energy Regulating

- •The patented spool valve is used to ensure the design of best area of thrust surface ratio, and the adjustment is rapid and sensitive;
- Achieve energy regulation in the maximum range of 10-100%.

Oil Separation

The national patented oil and gas separator is used to achieve multiple impact separation, gravity separation, replaceable accumulation filter element separation and other means, and the gas oil content is lower than 5PPM.

Oil Cooling

The oil cooler adopts the refrigerant cooling method, applying the national patented high-efficiency heat exchange tube, integrated high-precision baffle plate, reasonable oil flow rate design and other technologies, which greatly improves the heat exchange efficiency, small in size and light in weight. The heat exchange is stable and reliable.



High Quality Components Ensures Quality


Housing

The brand-new metal mold has higher casting accuracy; the 3D technology is used to print the mold, and the production is more flexible and faster; the key parts are processed by advanced Japanese and German machining centers to ensure the machining accuracy.



Shaft Seal

Adopt specialized mechanical seal for refrigeration, hydraulic balance design on the end face, reliable driving mechanism, computer finite element analysis auxiliary seal cooling structure design, silicon carbide seal material, simple structure, convenient installation, excellent sealing, more suitable for changing working conditions.



Bearing

The thrust bearing used is imported high-precision and low-temperature special bearing, which is non-corrosive, anti-aging, high temperature resistant and high precision, which ensures the accurate positioning of the rotor for a long time; the radial support uses sliding bearings (also known as hydrodynamic bearings), and the shaft runs on the oil film. There is no mechanical wear, and the theoretical bearing life is unlimited. There is unique advantage, especially in large screw compressors or large differential pressure working conditions.



Sealing Element

The original imported seals are used and the sealing materials are determined by the refrigerant. The sealing of each component is more reliable.



Motor

- Professionally customized high-efficiency three-phase asynchronous motors comply with national standards and save energy and reduce consumption. The structure is reasonable, the efficiency is high, and the noise is low. The voltage and frequency can be customized according to user needs.
- •Relying on the data accumulation of the national-level test center for many years, the motor power is accurately selected, and the complete motor power spectrum keeps the motor efficiency running at the optimal value and reduces energy consumption.



Coupling

With advanced diaphragm coupling, the vibration can be eliminated and isolated. It has the function of automatic centering and long service life.



Oil Filter

The high precision and washable stainless-steel filter element are used to achieve high precision filtration, ensure the lubricating oil is clean, and improve the reliability of oil pump and compressor.



Oil Pump

The specialized oil pump is used, which has advanced structure, a certain pumping capacity, stable oil volume and oil pressure; the mechanical seal of oil pump shaft seal is resistant to high temperature, working medium corrosion and has long service life.



Automatic Control System

It is equipped with multiple protections such as early warning of load limit, over-limit alarm and over-limit shutdown to ensure the safe and stable operation of the compressor;

- •PID energy adjustment is adopted based on the change of load, which is featured with fast load tracking and low steady-state error and minimizes equipment energy consumption;
- •It can collect operation data, monitor and store etc., and the key data is presented in graph with the visual change trend, and it also can store historical alarm and query them;
- •The human-computer interface is color LCD touch screen and supports multi-language selections such as Chinese and English; the functions are universal, and users can configure functions according to the type of equipment;
- \bullet The Modbus RTU/RS485 communication interface is reserved for remote monitoring and control of the compressor with the host computer.





Optional Configuration

Electrical Heater

Maintain lubricating oil at a certain temperature to ensure that the unit can start up normally at a lower ambient temperature.

special applications, heavy-duty oil cooler and stainless steel oil cooler can be provided. The oil cooler may adopt refrigerant direct cooling, refrigerant throttling cooling and water cooling.

For industrial refrigeration and other

Double Oil Filter

It can be equipped with double oil filter as needed, one for use and one for standby, and it can be switched without shutdown.

Water-Cooling Type Oil Cooler

Water-cooling type oil cooler can be selected according to the site conditions, and the materials of shell and heat exchange tube can be flexibly selected on the basis of different water quality conditions.

Instrument

The pressure and temperature sensors and transmitters supplied by internationally renowned brands such as Rosemount/EJA can be configured as required.

Oil Temperature Control

The oil temperature control valves supplied by internationally renowned brands can be configured as required, which can accurately control the temperature of the lubricating oil and ensure the reliable operation of the unit.

Anti-Explosion

The explosion-proof equipment can be customized according to the requirements of the use condition. The instruments, valves, and electrical components can meet the requirements of the explosion-proof standards, and can also meet the requirements of different explosion-proof systems such as ATEX/IEC.











Features


- \bullet The compressor has a full type spectrum and the displacement range is 285 m³/h ~14000m³/h;
- It is widely used and can be operated under high temperature, moderate temperature and low temperature conditions;
- •The unit is suitable for R717, R507A, R404A and other working mediums;
- •The unit can be customized according to the special needs of users;
- •The standard configuration control mode is automatic.

Single-Stage Screw Refrigeration Compressor Model

Applicable Conditions Refrigerant R717A

Refrigerant	R717A	R507A			
Discharge Pressure (MPa)	≤1.67	≤1.95			
Suction Pressure (MPa)	-0.03 ∼ 0.586				
Oil Pressure (MPa)	$0.1 \sim 0.3$ Higher Than Dischard Pressure				
Oil Temperature (°C)	30 ~	~ 65			
Cooling Water Inlet Temperature (°C)	15 ~ 33				
Cooling Water Flow Deviation	±10%				

Note: If it is out of the conditions above, please contact MOON-TECH for making non-standard order.

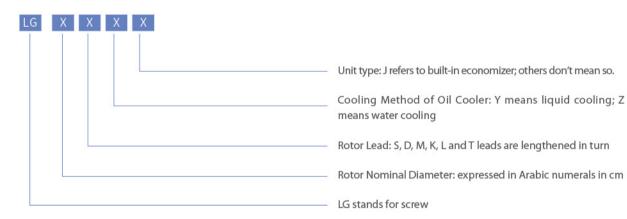



	lter	n	Unit	Series 12 M	Series 16S	Series 16M	Series 20S	
	Refrige	erant	Category		R717/	R507A		
The	eoretical Displacem	nent of Compressor	m³/h	285	385	598	806	
	High Tempe Conditio		kW	316/239	440/333	692/526	1001/711	
Refrigera	ting Capacity	Moderate Temperature Conditions	kW	175/161	244/224	384/355	555/480	
		Low Temperature Conditions	kW	62/63	88/89	138/141	201/194	
		High Temperature Conditions	kW	65/75	90/110	132/160	185/220	
Motor R	lated Power	Moderate Temperature Conditions	kW	65/75	90/110	132/160	185/220	
		Low Temperature Conditions	kW	55/65	75/90	110/132	160/185	
	Electrical	System			3P 50H	Z 380V		
	Rated S	peed	r/min	2960				
C	harging Volume of	Refrigeration Oil	L	~ 160	~ 240 ~ 380			
	Inlet and Outlet	Pipe Diameter	mm	DN80/ DN65	DN125/ DN80		DN150/ DN100	
Inlet a	and Outlet Pipe Dia	ameter of Economizer	mm	DN50	DN50	DN50	DN65	
	Safety Valve	Diameter	mm	DN20	DI	N25	DN32	
		Туре		Shell and Tube				
		Inlet and Outlet Pipe Diameter	mm	DN32	DN	N40	DN65	
Oil Cooler	Water Cooling	Cooling Water Flow	m³/h	~ 10	\sim 15	∼ 15	~ 20	
Oil Coolei		Water Quality Standard		GB50050 "Code fo		ustrial Recirculat ment"	ing Cooling Water	
	Liquid Cooling	Liquid Inlet Pipe Diameter	mm	DN25	DI	N32	DN40	
	Liquid Cooling	Discharge Pipe Diameter	mm	DN40	DI	N50	DN65	
Oil	Pump	Model		ZHB80P6	ZHB	125P4	ZHB125P4 or ZHB150P6*	
		Motor Power	kW	1.5	2	.2	2.2 or 3*	
	Dimensions	(L*W*H)	mm	2620X1370x1780	3060X14	170x2030	3180X1640x2260	
	Net Weigh	t of Unit	kg	~ 2000	∼ 2450	∼ 2750	~ 44 50	

^{1.} High temperature working condition is $+40/+5^{\circ}$ C, moderate temperature working condition is $+40/-10^{\circ}$ C, low temperature working condition is $+40/-35^{\circ}$ C; the corresponding high temperature working condition of R507A is $+40/+0^{\circ}$ C;

With economizer, the liquid outlet temperature is 5° C higher than the saturation temperature of the air make-up pressure. The cooling water inlet temperature of the oil cooler is $+33^{\circ}$ C, and the temperature difference between the inlet and outlet water is 5° C.

^{2. *}For series LG20S, the motor power is 3kW when used in R507A.

)	ltem	Unit	Series 20M	Series 20L	Series 20T	Series 25S		
	Ref	rigerant	Category		R717/F	R507A			
Theo	retical Displa	cement of Compressor	m³/h	1120	1486	1670	1825		
		High Temperature Conditions	kW	1339/1007	1756/1320	1872/1411	2172/1642		
Refrigeratir	g Capacity	Moderate Temperature Conditions	kW	743/680	975/892	1040/954	1207/1110		
		Low Temperature Conditions	kW	269/272	353/357	385/382	443/453		
		High Temperature Conditions	kW	250/315	315/400	400/450	450/500		
Motor Rat	ed Power	Moderate Temperature Conditions	kW	250/315	315/400	400/450	400/500		
		Low Temperature Conditions	kW	200/250	250/355	280/400	315/450		
	Electrical System			3P 50HZ 380V 3P 50HZ 10kV (or 6kV) 3P 50HZ 10kV (or 6kV)			0kV (or 6kV)		
	Rated Speed				2960				
Cha	rging Volum	e of Refrigeration Oil	L	~ 380	~ 450	~ 650	~ 700		
	nlet and Out	let Pipe Diameter	mm	DN150/ DN100	DN200/ DN150	DN200/ DN150	DN200/ DN150		
Inlet an	d Outlet Pipe	Diameter of Economizer	mm	DN65	DN65	DN65	DN80		
	Safety Va	lve Diameter	mm	DN32	DN50	DN50	DN50		
		Туре		Shell and Tube					
		Inlet and Outlet Pipe Diameter	mm	DN65	DN65	DN65	DN65		
011.61	Water Cooling	Cooling Water Flow	m³/h	∼ 25	~ 30	~ 35	~ 35		
Oil Cooler	200g	Water Quality Standard		GB50050 "Cod	GB50050 "Code for Design of Industrial Recirculating Cooling Water Treatment"				
	Liquid	Liquid Inlet Pipe Diameter	mm	DN40	DN40	DN40	DN50		
	Cooling	Discharge Pipe Diameter	mm	DN65	DN65	DN65	DN80		
		Model		ZHB125P4 o	r ZHB150P6*	ZHB150P6	ZHB220P4		
Oil P	ump	Motor Power	kW	2.2 0	2.2 or 3*		4		
	Dimensi	ons (L*W*H)	mm	3180X1610x2260	3610X1760x2540	4300X2140x3070	4600X2140x3150		
	Net We	ight of Unit	kg	~ 4660	~ 5900	~ 10000	11000 ~ 12000		

^{1.} High temperature working condition is $+40/+5^{\circ}$ C, moderate temperature working condition is $+40/-10^{\circ}$ C, low temperature working condition is $+40/-10^{\circ}$ C; the corresponding high temperature working condition of R507A is $+40/+0^{\circ}$ C;

With economizer, the liquid outlet temperature is 5° C higher than the saturation temperature of the air make-up pressure. The cooling water inlet temperature of the oil cooler is $+33^{\circ}$ C, and the temperature difference between the inlet and outlet water is 5° C.

^{2.} When the high-voltage motor is selected for the unit LG20L, the oil charge is 700kg, and the external dimensions and quality refer to the series LG20T.

^{3. *} For series LG20M/LG20L, the motor power is 3kW when used in R507A.



		ltem	Unit	Series 25M	Series 25K	Series 25L	Series 25T	
	Ref	frigerant	Category		R717/	R507A		
Theore	tical Displa	cement of Compressor	m³/h	2289	2564	2840	3208	
		High Temperature Conditions	kW	2731/2069	2906/2275	3393/2579	3691/2890	
Refrigerating	Capacity	Moderate Temperature Conditions	kW	1518/1400	1618/1540	1889/1746	2055/1956	
		Low Temperature Conditions	kW	557/567	594/622	694/705	755/790	
		High Temperature Conditions	kW	500/630	560/710	630/800	710/900	
Motor Rate	d Power	Moderate Temperature Conditions	kW	500/630	560/710	560/800	710/900	
		Low Temperature Conditions	kW	400/560	400/630	500/710	500/800	
	Electrical System				3P 50HZ 10	0kV (or 6kV)		
	Rated Speed			2960				
Charg	ging Volun	ne of Refrigeration Oil	L	~ 700	~ 700	~ 700	~ 1000	
In	let and Ou	tlet Pipe Diameter	mm	DN200/ DN150	DN250/ DN150	DN250/ DN150	DN350/ DN150	
Inlet and	Outlet Pipe	e Diameter of Economizer	mm	DN80	DN80	DN80	DN125	
	Safety V	alve Diameter	mm	DN50 DN50 DN50 2XDN5			2XDN50	
		Туре			Shell a	nd Tube		
		Inlet and Outlet Pipe Diameter	mm		Dn65		Dn100	
Oil Caalar	Water Cooling	Cooling Water Flow	m³/h	~55 ~90				
Oil Cooler		Water Quality Standard		Gb50050 "Cod		ustrial Recirculating ment"	Cooling Water	
	Liquid	Liquid Inlet Pipe Diameter			DN50		DN65	
	Cooling	Discharge Pipe Diameter	mm		DN80		DN125	
Oil Pui	mn	Model			ZHB220P4		ZHB300P8	
Oli Pul	пр	Motor Power	kW	4			5.5	
	Dimens	ions (L*W*H)	mm	4600X2140x3150			7990X2930x3650	
	Net We	eight of Unit	kg		11000 ~ 12000		~ 19000	

 $^{1.} High temperature working condition is +40/+5^{\circ}C \ , moderate temperature working condition is +40/-10^{\circ}C \ , low temperature working condition is +$ 35°C; the corresponding high temperature working condition of R507A is +40/+0°C; 2. With economizer, the liquid outlet temperature is 5°C higher than the saturation temperature of the air make-up pressure. The cooling water inlet

temperature of the oil cooler is $+33^{\circ}\text{C}$, and the temperature difference between the inlet and outlet water is 5°C .

		ltem	Unit	Series 32S	Series 32D	Series 32M	Series 32L	
	Ref	rigerant	Category		R717/	R507A		
Theoret	Theoretical Displacement of Compressor			3500	3920	4341	5182	
		High Temperature Conditions	kW	4118/3130	4395/3442	5167/3930	6178/4696	
Refrigerating C	apacity	Moderate Temperature Conditions	kW	2292/2119	2446/2329	2877/2659	3439/3178	
		Low Temperature Conditions	kW	844/861	901/946	1060/1080	1268/1287	
		High Temperature Conditions	kW	800/1000	900/1120	1000/1120	1120/1400	
Motor Rated	Power	Moderate Temperature Conditions	kW	710/1000	800/1000	900/1120	1000/1400	
		Low Temperature Conditions	kW	560/800	630/900	710/1000	900/1250	
	Electri	cal System			3P 50HZ 10kV (o	r 6kV)		
	Rated Speed			2960				
Charg	Charging Volume of Refrigeration Oil			~ 1250				
Inle	et and Out	let Pipe Diameter	mm		DN350/	DN200		
Inlet and C	outlet Pipe	Diameter of Economizer	mm	DN125				
	Safety Va	lve Diameter	mm	2XDN50				
		Туре			Shell ar	nd Tube		
		Inlet and Outlet Pipe Diameter	mm		DN	100		
	Water Cooling	Cooling Water Flow	m³/h		~	90		
Oil Cooler	Cooling	Water Quality Standard		GB50050"Code	e for Design of Indu Treati		g Cooling Water	
	Liquid	Liquid Inlet Pipe Diameter	mm		DN	165		
	Cooling	Discharge Pipe Diameter	mm		DN	125		
Oil D		Model			ZZB4	00P6		
Oil Pum	p	Motor Power	kW	7.5				
	Dimensi	ons (L*W*H)	mm	~ 7990x2930x3650				
	Net We	ight of Unit	kg		~ 2	1700		

^{1.} High temperature working condition is $+40/+5^{\circ}$ C, moderate temperature working condition is $+40/-10^{\circ}$ C, low temperature working condition is $+40/-35^{\circ}$ C; the corresponding high temperature working condition of R507A is $+40/+0^{\circ}$ C;

^{2.} With economizer, the liquid outlet temperature is 5° C higher than the saturation temperature of the air make-up pressure. The cooling water inlet temperature of the oil cooler is +33°C, and the temperature difference between the inlet and outlet water is 5° C.





		Item	Unit	Series 32T	Series 40S	Series 40M	Series 40L
		Refrigerant	Category		R717/R	3507A	
The	Theoretical Displacement of Compressor			5890	6514	7539	9500
		High Temperature Conditions	kW	6660/5215	7362/5711	8415/6548	10112/7958
Refrigeratin	g Capacity	Moderate Temperature Conditions	kW	3708/3530	4099/3868	4760/4471	5586/5274
		Low Temperature Conditions	kW	1367/1430	1494/1530	1757/1763	2013/2134
		High Temperature Conditions	kW	1250/1600	1600/1800	1800/2240	2200/2500
Motor Rate	ed Power	Moderate Temperature Conditions	kW	1120/1500	1400/1800	1600/2240	2200/2500
		Low Temperature Conditions	kW	1000/1400	1120/1500	1250/2000	1600/2200
	Ele	ectrical System		3P 50H	Z 10kV (or 6kV	′)	
		Rated Speed	r/min		296		
Charging Volume of Refrigeration Oil			L	~ 1250	~ 1800		~ 2600
	Inlet and Outlet Pipe Diameter		mm	DN350/ DN250		DN400/ DN:	300
Inlet	and Outlet F	Pipe Diameter of Economizer	mm	DN125	DN150		DN200
	Safet	y Valve Diameter	mm	2XDN50 2XDN50		2xDN80	
		Туре		Shell and Tube			
		Inlet and Outlet Pipe Diameter	mm	DN100	DN125		DN150
	Water	Cooling Water Flow	m³/h	~ 90	~ 1	150	~ 210
Oil Cooler	Cooling	Water Quality Standard		GB50050 "Code for De Cooling V	sign of Industria Water Treatmen		
	Liquid	Liquid Inlet Pipe Diameter	mm	DN65	DN	125	DN150
	Cooling	Discharge Pipe Diameter	mm	DN125	DN	150	DN200
OHP		Model		ZZB400P6	ZZB8	00P6	ZZB1200P4
Oil Pu	шр	Motor Power	kW	7.5	1	5	22
	Dim	ensions (L*W*H)	mm	~ 7990x2930x3650	∼ 9920×3	500×4550	12000X4420X490
	Net	Weight of Unit	kg	~ 26000	~ 37	7000	~ 41000

Note

- 1. High temperature working condition is $+40/+5^{\circ}$ C, moderate temperature working condition is $+40/-10^{\circ}$ C, low temperature working condition is $+40/-35^{\circ}$ C; the corresponding high temperature working condition of R507A is $+40/+0^{\circ}$ C;
- 2. With economizer, the liquid outlet temperature is 5°C higher than the saturation temperature of the air make-up pressure. The cooling water inlet temperature of the oil cooler is +33°C, and the temperature difference between the inlet and outlet water is 5°C.



MOON-TECH advocates the use of ODP=0, low-GWP environmentally-friendly working medium, independently research and develop green and efficient compressor products, and actively promotes the process of working medium substitution.

Due to the limited space, the sample book cannot list detailed compressor performance parameters, outline drawings of unit, work flow charts and foundation drawings, etc. If necessary, please contact our staff.



Features


- \bullet It is suitable for low temperature refrigeration under evaporating temperature below -25°C , and the efficiency is significantly higher than that of single-stage compressor unit with economizer;
- •There are four types of single-machine two-stage screw units, of which high and low pressure stages of LG2016MS, LG2520MS, LG3225LS compressor have energy adjustment devices, which can ensure the unit is always efficient and economical under low temperature working conditions;
- •The unit can be customized according to the special needs of users:
- The standard configuration control method is automatic.

Applicable Conditions

Refrigerant	R717
Discharge Pressure (MPa)	≤1.67
Suction Pressure (MPa)	-0.05 ~ 0.052
Oil Pressure (MPa)	0.05 ~ 0.3 Higher Than Discharge Pressure
Oil Temperature (°C)	30 ~ 65
Cooling Water Inlet Temperature (°C)	15 ~ 33
Cooling Water Flow Deviation	±10%

Note: If it is out of the conditions above, please contact MOON-TECH for making non-standard order.

Model of Single Machine Two-Stage Screw Refrigeration Compressor Unit

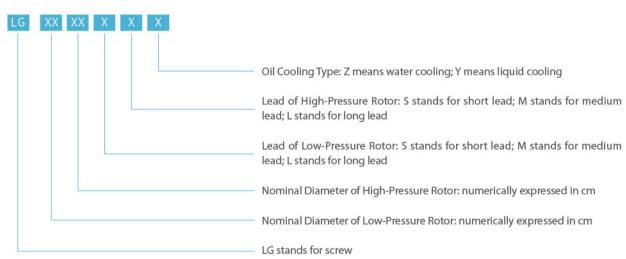



	ltem		Unit	LG1612MMZ(Y)	LG2016MSZ(Y)	LG2520MSZ(Y)	LG3225LSZ(Y)		
M	odel of Com	pressor		LG1612MM	LG2016MS	LG2520MS	LG3225LS		
TI		Low Pressure Stage	m³/h	598	1120	2289	5182		
Theoretical Disp	lacement	High Pressure Stage	m³/h	213	385	806	1825		
N	lominal Con	ditions	°C		+40)/-35			
Nomin	al Refrigerat	ing Capacity	kW	139	270	561	1262		
Rate	d Power of N	lain Motor	kW	110	185	355	800		
	Electrical Sy	stem		3N 50H	IZ 380V	3N 50H	HZ 10kV		
	Rated Spe	eed	r/min		29	960			
	Refrigera	nt			R7	717			
Charging	Volume of R	efrigeration Oil	L	~ 240	~ 380	~ 700	~ 1100		
Dia	meter of Int	ake Pipe	mm	DN125	DN150	DN200	DN350		
Dia	meter of Out	take Pipe	mm	DN65	DN80	DN100	DN150		
Pipe Diameter	of Inlet and	Outlet of Intercooler	mm	DN50	DN65	DN80	DN125		
Dia	meter of Saf	ety Valve	mm	DN25	DN32	DN50	DN50*2		
		Туре			Shell a	nd Tube			
Water Cooler/Oil	Inlet and	Outlet Pipe Diameter	mm	DN40	DN65	DN65	DN100		
Cooler	Coo	ling Water Flow	m³/h	~ 20	~ 25	~ 45	~ 75		
	Water	Quality Standard		GB50050 "Cod	GB50050 "Code for Design of Industrial Recirculating Cooling Water Treatment"				
		Туре			Shell ar	nd Tube			
Liquid/Oil Cooler	Liguid I	nlet Pipe Diameter	mm	DN32	DN40	DN50	DN65		
	Discha	rge Pipe Diameter	mm	DN50	DN65	DN80	DN125		
Oil Pump		Model		ZH125P4	ZH220P4	ZZB300P8	ZZB600P4		
Oli Pump	ı	Motor Power	kW	2.2	4	5.5	11		
D	imensions (l	_*W*H)	mm	3100x1390x2030	3460x1650x2230	5070x2380x3150	8890x2840x3900		
I	Net Weight o	of Unit	kg	~ 3300	~ 4500	~ 11000	~ 22285		

Note:

^{2.} Due to the difference in the working conditions of the unit, the power and protection level of the main motor may be different. The shape and foundation dimensions will also vary with the main motor, which are not listed one by one in the table.



MOON-TECH advocates the use of ODP=0, low-GWP environmentally-friendly working medium, independently research and develop green and efficient compressor products, and actively promotes the process of working medium substitution. Due to the limited space, the sample book cannot list detailed compressor performance parameters, outline drawings of unit, work flow charts and foundation drawings, etc. If necessary, please contact our staff.

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -25°C or below.



Features


- •It is suitable for low temperature refrigeration under evaporating temperature below -25°C, and the efficiency is significantly higher than that of single-stage compressor unit with economizer;
- •The mixing ratio is diverse. The optimum ratio can be selected according to different working conditions and medium of users. The ratio of high and low pressure of R717 is between 3 and 4, and that of R507A is between 2 and 3.
- •The high and low pressure stages are equipped with energy adjustment devices to ensure that the unit is always efficient and economical under low temperature conditions;
- The compressor of high and low pressure stages starts in different stages with low starting current.
- •The oil supply mode of low pressure stage compressor is pressure difference;
- •The high-pressure stage can be operated independently to achieve rapid cooling and high efficiency.
- •The unit is applicable to R717, R507A, R404A and other working
- •The unit can be configured as required by users.
- •The control mode is automatic.

Applicable Conditions

Refrigerant	R717	R507a	
Discharge Pressure (MPa)	≤1.67	≤1.95	
Suction Pressure (MPa)	-0.05 ~ 0.005		
Oil Pressure	0.1 ∼ 0.3 Higher Than Discharge Pressure		
Oil Temperature (°C)	30 ~	- 65	
Cooling Water Inlet Temperature (°C)	15 ~ 33		
Cooling Water Flow Deviation	±10%		

Note: If it is out of the conditions above, please contact MOON-TECH for making non-standard order.

Model of Dual-Machine Two-Stage Screw Skid Block Unit

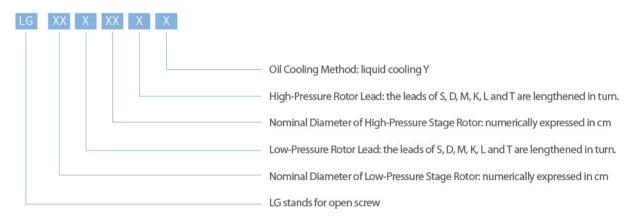





ltem			Unit	LG16M12M	LG20M12M	LG20L16S	LG20T16M		
	Refrigera	nt	Туре		R7	17			
	Low Pressure	Model		LG16M	LG20M	LG20L	LG20T		
Camprassas	Stage	Theoretical Displacement	m³/h	598	1120	1486	1672		
Compressor	High Pressure	Model		LG12M	LG12M	LG16S	LG16M		
	Level	Theoretical Displacement	m³/h	285	285	385	598		
	Nominal Con	ditions	°C		+40)/-40			
N	ominal Refrigerat	ing Capacity	kW	117	207	278	329		
Date d Davis	-6M-1-M-4	Low Pressure Stage	kW	55	110	132	160		
Rated Power	of Main Motor	High Pressure Stage	kW	65	65	90	132		
Flored	Low Pressure Stage			3N 50HZ 380V					
Electrica	l System	High Pressure Stage		3N 50HZ 380V					
Char	ging Volume of R	defrigeration Oil	L	~ 240	~ 360	~ 360	~ 500		
	Diameter of Int	ake Pipe	mm	DN125	DN150	DN200	DN200		
	Diameter of Out	ttake Pipe	mm	DN65	DN65	DN80	DN80		
Inlet and	Outlet Pipe Dian	neter of Economizer	mm	DN50	DN65	DN65	DN65		
	Diameter of Saf	ety Valve	mm	DN25	DN25	DN50	DN50		
		Туре			Shell a	nd Tube			
Liquid/C	il Cooler	Liquid Inlet Pipe Diameter	mm	DN32	DN40	DN40	DN40		
		Discharge Pipe Diameter	mm	DN50	DN65	DN65	DN65		
_,,,,		Туре		ZHB	80P6	ZHB	125P4		
Oil P	ump	Motor Power	kW	1	1.5		2.2		
	Dimensions (L*W*H)	mm	5400x1640x2340	5400x1640x2460	6040x1940x2780	6260x1940x2830		
	Net Weight o	of Unit	kg	~ 3300	~ 4650	~ 6300	~ 7700		

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3.} This table shows a long structure, if other forms are needed, it can be customized.

	ltem		Unit	LG25S16M	LG25M16M	LG25K20S	LG25L20S		
	Refrigera	ant	Type		R717				
	Low Pressure	Model		LG25S	LG25M	LG25K	LG25L		
Compressor	Stage	Theoretical Displacement	m³/h	1825	2289	2570	2840		
Compressor	High Pressure	Model		LG16M	LG16M	LG20S	LG20S		
	Level	Theoretical Displacement	m³/h	598	598	806	806		
	Nominal Con	ditions	°C		+40/	-40			
N	Iominal Refrigera	ting Capacity	kW	354	429	502	551		
Pated Power	of Main Motor	Low Pressure Stage	kW	185	200	220	220		
nateu rowei	OI MAIII MOLOI	High Pressure Stage	kW	132	132	185	185		
Electric	Low Pressure Stage Electrical System			3N 50HZ 380V					
Electric	arsystem	High Pressure Stage		3N 50HZ 380V					
Cha	rging Volume of F	Refrigeration Oil	L	~ 600	~ 600	~600	~ 600		
	Diameter of In	take Pipe	mm	DN200	DN200	DN250	DN250		
	Diameter of Ou	ttake Pipe	mm	DN80	DN80	DN100	DN100		
Inlet and	d Outlet Pipe Dian	neter of Economizer	mm	DN65	DN65	DN80	DN80		
	Diameter of Sa	fety Valve	mm	DN50	DN50	DN50	DN50		
		Туре			Shell an	d Tube			
Liquid/	Oil Cooler	Liquid Inlet Pipe Diameter	mm	DN50	DN50	DN50	DN50		
		Discharge Pipe Diameter	mm	DN80	DN80	DN80	DN80		
Oil	Pump	Туре			ZHB12	25P4			
Oil	rump	Motor Power	kW		2.2	2			
	Dimensions (L*W*H)	mm	6260X1940x2970	6260X1940x2970	6650X1940x3000	6650X1940x3000		
	Net Weight	of Unit	kg	~ 8000	~ 9000	~ 11000	~ 12000		

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3.} The table shows a long structure, if other forms are needed, it can be customized.





	Item		Unit	LG25T20S	LG32S20S	LG32M20M
	Refrigera	nt	Туре		R717	
	Low Pressure	Model		LG25T	LG32S	LG32M
Compressor	Stage	Theoretical Displacement	m³/h	3208	3500	4341
Compressor	High Pressure	Model		LG20S	LG20S	LG20M
	Level	Theoretical Displacement	m³/h	806	806	1120
	Nominal Cond	litions	°C		+40/-40	
Ne	ominal Refrigerati	ng Capacity	kW	607	653	820
Pated Dawer	of Main Motor	Low Pressure Stage	kW	250	280	315*
nated Power (OF MAIN MOTOL	High Pressure Stage	kW	185	185	250
Electrica	Low Pressure Stage Electrical System			3N 50HZ 380V		
Electrica	ii system	High Pressure Stage		3N 50HZ 380V		
Char	ging Volume of Re	efrigeration Oil	L	~ 900	~ 900	~ 900
	Diameter of Inta	ake Pipe	mm	DN350	DN350	DN350
	Diameter of Out	take Pipe	mm	DN100	DN100	DN100
Inlet and	Outlet Pipe Diam	eter of Economizer	mm	DN80	DN80	DN80
	Diameter of Safe	ety Valve	mm	DN50	DN50	DN50
		Type			Shell and Tube	
Liquid/C	Oil Cooler	Liquid Inlet Pipe Diameter	mm	DN65	DN65	DN65
		Discharge Pipe Diameter	mm	DN125	DN125	DN125
Oilp	'ump	Туре			ZHB125P4	
Oli P	чпр	Motor Power	kW		2.2	
	Dimensions (L	*W*H)	mm	7870x2450x3480	8090x2450x3550	8300x2450x3550
	Net Weight of	fUnit	kg	~ 17000	~ 18000	~ 20000

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3. *}Electrical system is 3N 50HZ 10kV.

^{4.} The table shows a long structure, if other forms are needed, it can be customized.

ltem			Unit	LG32L20L	LG40S25M	LG40M25L		
Refrigerant			Туре	R717				
	Low Pressure Stage	Model		LG32L	LG40S	LG40M		
Compressor		Theoretical Displacement	m³/h	5182	6514	7539		
Compressor	High Pressure	Model		LG20L	LG25M	LG25L		
	Level	Theoretical Displacement	m³/h	1486	2289	2840		
	Nominal Con	ditions	°C		+40/-40			
N	lominal Refrigerat	ting Capacity	kW	974	1255	1450		
Rated Power	of Main Motor	Low Pressure Stage	kW	355	400	450		
nateu rowei	OI WAITI WOLOI	High Pressure Stage	kW	355	500	630		
Flectric	al System	Low Pressure Stage		3N 50HZ 10KV				
Electric	ai System	High Pressure Stage		3N 50HZ 10KV				
Charging Volume of Refrigeration Oil		L	~ 900	~ 1500	~ 1500			
	Diameter of Intake Pipe		mm	DN350	DN400	DN400		
	Diameter of Outtake Pipe			DN100	DN150	DN150		
Inlet and	d Outlet Pipe Dian	neter of Economizer	mm	DN80	DN150	DN150		
	Diameter of Saf	fety Valve	mm	DN50 DN50X2 DN50X2				
		Туре		Shell and Tube				
Liquid/0	Oil Cooler	Liquid Inlet Pipe Diameter	Pipe Diameter mm DN65		DN125	DN125		
		Discharge Pipe Diameter	mm	DN125	DN150	DN150		
Cit	Pump	Туре		ZHB125P4	ZHB220P4	ZHB220P4		
Oll	Pump	Motor Power	kW	2.2	4	4		
	Dimensions (L*W*H)			9020x2450x3550	10600X3740X4050	10600X3740X4050		
	Net Weight of Unit			~ 22000	~ 32000	~ 34000		

Note:

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3.} This table shows a long structure, if other forms are needed, it can be customized.





ltem		Unit	LG16M12M	LG20M16M	LG20L16M	LG20T20S		
Refrigerant		Туре	R507A					
	Low Pressure	Model		LG16M	LG20M	LG20L	LG20T	
	Stage	Theoretical Displacement	m³/h	598	1120	1486	1672	
Compressor	High Pressure	Model		LG12M	LG16M	LG16M	LG20S	
	Level	Theoretical Displacement	m³/h	285	598	598	806	
	Nominal Con	ditions	°C	+40/-40				
1	Nominal Refrigerat	ing Capacity	kW	157	314	396	462	
		Low Pressure Stage	kW	65	132	160	185	
Rated Powe	r of Main Motor	High Pressure Stage	kW	75	160	160	220	
Florensi	Contain	Low Pressure Stage		3N 50HZ 380V				
Electric	cal System	High Pressure Stage		3N 50HZ 380V				
Cha	Charging Volume of Refrigeration Oil		L	~ 240	~ 360	~ 360	~ 550	
	Diameter of Intake Pipe		mm	DN125	DN150	DN200	DN200	
	Diameter of Outtake Pipe		mm	DN65	DN80	DN80	DN100	
Inlet and	Inlet and Outlet Pipe Diameter of Economizer		mm	DN50	DN65	DN65	DN80	
	Diameter of Safety Valve		mm	DN25	DN25	DN25	DN50	
		Туре		Shell and Tube				
Liquid/	Oil Cooler	Liquid Inlet Pipe Diameter	mm	DN32	DN40	DN40	DN40	
		Discharge Pipe Diameter	mm	DN50	DN65	DN65	DN65	
611	Dum	Туре		ZHB80P6 ZHB125P4 ZHB1		ZHB150P6		
Oil	Pump	Motor Power	kW	1.5	2.2		3	
	Dimensions (L*W*H)		mm	5400x1640x2340	5400x1640x2460	6040x1940x2780	6260x1940x2830	
	Net Weight of Unit		kg	~ 3300	~ 4650	~ 6300	~ 7700	

Note:

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3.} This table shows a long structure, if other forms are needed, it can be customized.

ltem			Unit	LG25S20S	LG25M20M	LG25K20M	LG25L20L	
Refrigerant		Туре	R507A					
	Low Pressure Stage	Model		LG25S	LG25M	LG25K	LG25L	
Compressor		Theoretical Displacement	m³/h	1825	2289	2570	2840	
Compressor	High Pressure Level	Model		LG20S	LG20M	LG20M	LG20L	
		Theoretical Displacement	m³/h	806	1120	1120	1486	
	Nominal Con	ditions	°C	+40/-40				
N	lominal Refrigerat	ing Capacity	kW	496	644	703	820	
Pated Power	of Main Motor	Low Pressure Stage	kW	200	220	250	250	
nated Fower	OI MAIN MOTO	High Pressure Stage	kW	220	315	315	400*	
Electric	al System	Low Pressure Stage		3N 50HZ 380V				
Electric	ai system	High Pressure Stage			3N 50H	HZ 380V		
Cha	rging Volume of R	efrigeration Oil	L	~ 550	~ 550	~ 550	~ 550	
	Diameter of Intake Pipe		mm	DN200	DN200	DN250	DN250	
	Diameter of Outtake Pipe		mm	DN100	DN100	DN100	DN100	
Inlet and	Inlet and Outlet Pipe Diameter of Economizer		mm	DN80	DN80	DN80	DN80	
	Diameter of Safety Valve		mm	DN50	DN50	DN50	DN50	
		Туре		Shell and Tube				
Liquid/	Oil Cooler	Liquid Inlet Pipe Diameter	mm	DN50	DN50	DN50	DN50	
		Discharge Pipe Diameter	mm	DN80	DN80	DN80	DN80	
Oil	Oil Pump	Туре		ZHB150P6				
Oii	i ump	Motor Power	kW	3				
	Dimensions (L*W*H)		mm	6260x1940x2970	6650x1940x2970	6650x1940x3000	6900x1940x3000	
	Net Weight of Unit		kg	~ 8000	~ 9000	~ 10000	~ 12000	

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40° C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3. *}Electrical system is 3N 50HZ 10kV.

 $^{{\}it 4. The table shows a long structure, if other forms are needed, it can be customized.}\\$





ltem			Unit	LG25T20L	LG32S25S	LG32M25M	LG32L25M	
Refrigerant			Туре	R507A				
	Low Pressure	Model		LG25T	LG32S	LG32M	LG32L	
	Stage	Theoretical Displacement	m³/h	3208	3500	4341	5182	
Compressor	High Pressure	Model		LG20L	LG25S	LG25M	LG25M	
	Level	Theoretical Displacement	m³/h	1486	1825	2289	2289	
	Nominal Cor	nditions	°C	+40/-40				
N	Iominal Refrigera	ting Capacity	kW	886	998	1244	1409	
Date d Daniel	-614-1-14-4	Low Pressure Stage	kW	280	315	400	450	
Rated Power	of Main Motor	High Pressure Stage	kW	400	500	630	630	
Flactric	al Sustana	Low Pressure Stage		3N 50HZ 10kV				
Electric	al System	High Pressure Stage		3N 50HZ 10kV				
Cha	Charging Volume of Refrigeration Oil		L	~ 900	~ 900	~ 900	~ 900	
	Diameter of Intake Pipe		mm	DN350	DN350	DN350	DN350	
	Diameter of Outtake Pipe		mm	DN100	DN150	DN150	DN150	
Inlet and	Inlet and Outlet Pipe Diameter of Economizer		mm	DN80	DN80	DN80	DN80	
	Diameter of Safety Valve		mm	DN50	DN50	DN50	DN50	
		Туре		Shell and Tube				
Liquid/	Oil Cooler	Liquid Inlet Pipe Diameter	mm	DN65	DN65	DN65	DN65	
		Discharge Pipe Diameter	mm	DN125	DN125	DN125	DN125	
Oil Pump		Туре		ZHB150P6 ZHB220P4				
Oll I	гипр	Motor Power	kW	3	4			
	Dimensions (L*W*H)		mm	7870x2450x3480	8090x2450x3580	8300x2450x3550	8300x2450x3550	
Net Weight of Unit		kg	~ 17000	~ 18000	~ 19000	~ 20000		

Note:

^{1.} The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.

^{2.} Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.

^{3.} This table shows a long structure, if other forms are needed, it can be customized.

Item			Unit	LG40S32S	LG40M32M		
Refrigerant			Type	R507A			
	Low Pressure	Model		LG40S	LG40M		
Compressor	Stage	Theoretical Displacement	m³/h	6514	7539		
Compressor	High Pressure	Model		LG32S	LG32M		
	Level	Theoretical Displacement	m³/h	3500	4341		
	Nominal Cor	nditions	°C	+40/	/-40		
N	lominal Refrigera	ting Capacity	kW	1833	2142		
Pated Power	of Main Motor	Low Pressure Stage	kW	560	630		
nated Power	of Main Motor	High Pressure Stage	kW	900	1120		
Electric	al System	Low Pressure Stage		3N 50HZ 10kV			
Electrica	ai System	High Pressure Stage		3N 50HZ 10kV			
Cha	Charging Volume of Refrigeration Oil		L	~ 1500	~ 1500		
	Diameter of In	take Pipe	mm	DN400	DN400		
	Diameter of Ou	ttake Pipe	mm	DN200	DN200		
Inlet and	d Outlet Pipe Diar	meter of Economizer	mm	DN150	DN150		
	Diameter of Sa	fety Valve	mm	DN50X2 DN50X2			
		Type		Shell an	d Tube		
Liquid/0	Dil Cooler	Liquid Inlet Pipe Diameter	mm	DN125	DN125		
		Discharge Pipe Diameter	mm	DN150	DN150		
Oil	Pump	Type		ZZB4	00P6		
Oil	ump	Motor Power	kW	7.	5		
	Dimensions (L*W*H)			10600X3740x4050	11000X3740x4050		
	Net Weight of Unit			∼ 33000	~ 35000		

Note:

- 1. The main motor of the unit is configured according to the nominal working condition. Under this configuration, the unit can be put into operation at full load under the evaporation temperature of -40°C or below.
- 2. Due to the difference in the working conditions of the unit, the power of the main motor may be different, and the outline dimensions will also vary with the main motor, which are not listed one by one in the table.
- 3. This table shows a long structure, if other forms are needed, it can be customized.



MOON-TECH advocates the use of ODP=0, low-GWP environmentally-friendly working medium, independently research and develop green and efficient compressor products, and actively promotes the process of working medium substitution. Due to the limited space, the sample book cannot list detailed compressor performance parameters, outline drawings of unit, work flow charts and foundation drawings, etc. If necessary, please contact our staff.

Global Marketing Service Agency Network

S. East & South Asia

& South Asia

Yantai Moon (Vietnam) Co., Ltd.

Mobile: +84-906893588

Email: jeffchong@moon-tech.com

Pt. Yantai Moon Indonesia (Jakarta)

Mobile: +62-812-8570458

Email: stevenchen@moon-tech.com

Pt. Yantai Moon Indonesia (Surabaya)

Mobile: +62-813-15817758 Email: kevinxu@moon-tech.com

Thailand Office

Mobile: +66-970749735

Email: shimeihao@moon-tech.com

Myanmar Office

Mobile: +95-9795856929

Email: naizengliu@moon-tech.com

Malaysia Office

Mobile: +60-162285069

Email: qingfangma@moon-tech.com

Philippines Office

Mobile: +63-9171171410

Email: xuhangyuan@moon-tech.com

Taiwan Office

Mobile: +886-975096307

Email: hetaoliu@moon-tech.com

India Office

Mobile: +86- 17519968504 Email: jim@moon-tech.com

Africa

Egypt Office

Mobile: +966-548730449 Email: shajc@moon-tech.com

Kenya Office

Mobile: +254-713202388 Email: tenglin@moon-tech.com

South Africa Office

Mobile: +27-638491822

Email: Joechen@moon-tech.com

Mauritania Office

Mobile: +222-41834569

Email: perryxin@moon-tech.com

Latin America

Chile Office

Mobile: +56-994888888

Email: simonliu@moon-tech.com

Peru Office

Mobile: +51-967209708

Email: mingxing@moon-tech.com

Ecuador Office

Mobile: +593-987877420

Email: peterzhang@moon-tech.com

Argentina Office

Mobile: +54-91171008380 Email: javierli@moon-tech.com

Middle East

Saudi Arabia Office

Mobile: +966-504362717

Email: tonydeng@moon-tech.com

Oman office (UAE/Oman /Iran /Turkey)

Mobile: +86- 13964503338

Email: perryxue@moon-tech.com

Russia & UZB

Moscow Russia Office

Mobile: +7-9250566475 Email: yanli@moon-tech.com

Email: pengyuanche@moon-tech.com

Vladivostok Russia Office

Mobile: +7-9143430880

Email: hongweiwu@moon-tech.com

Uzbekistan Office

Mobile: +998-909278908

Email: zhongyao@moon-tech.com

Overseas Business Contact

Tel: +86-535-6245052

Fax:+86-535-6242155

Email:info@moon-tech.com

MOON ENVIRONMENT TECHNOLOGY CO.,LTD.

Add: No.1 Binglun Road, Yantai, China 264002

Tel: +86-535-6697172 Email: info@moon-tech.com Web: www.moonoverseas.com







Moon Environment Technology Co., Ltd. has the right to change product and technical specifications and data of the samples without prior notice. Moon Environment Technology Co., Ltd. owns the copyright of the trademark (44) and MOON and any other combinations used in the sample book.